




## Eclipse 2

Fluid Viscosity: 1 cps 0.25 HP/KW Motor

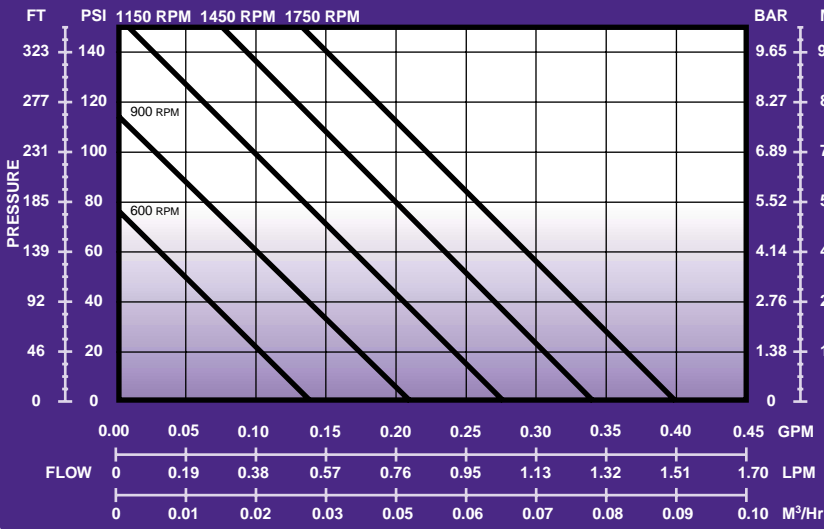

## General Specifications

Port Size and Type	1/4" NPT or BSPT
Direction of Rotation	Bi-directional
Theoretical Displacement	0.02 gal / 100 rev. (0.76 cc / rev.)
Maximum Differential Pressure	150 psi (10 Bar)
Maximum Allowable Working Pressure	200 psi (14 Bar)
Maximum Speed	1750 rpm
Maximum Capacity at Opsig	0.4 gpm (1.5 LPM)
Maximum Viscosity	5,000 cps
Maximum Fluid Temperature	150°F (65°C)
Fluid pH Range	0-14
Gear Type	External Spur Gear
Bearing Type	Sleeve Bearing Integral Wear Plate
Motor Frame Sizes, NEMA	56C, 143/145TC
Motor Frame Sizes, IEC	63, 80 B14 Flange

## Eclipse 2

Fluid Viscosity: 100 cps 0.25 HP/KW Motor

